



0600 SERIES

75LBS
casterdepot.com



FEATURES

KINGPIN: 5/16" rivet
RACEWAY: 3/16" diameter single race; hardened steel load bearings
BUSHING: Nylon
AXLE&NUT: 1/4" riveted axle
FINISH: Bright chrome

HARDENED: Washers
SPECIAL: Only the highest quality of bright cold rolled steel is used. 602 & 652 Series are BIFMA approved. For BIFMA approved casters, please specify.
LEG SPACING: 0602 - 1 3/4", 0652 - 2", 0672 - 2"

EXCELLENT FOR:

- Office furniture
- Institutional equipment
- Hospital environment



ENVIROTHANE™



ENVIROTHANE™
GREY



POLYOLEFIN

OPTIONS:

- SLB Side Locking Brake
(for S0652 and S0672 only)
- HT Heat Treated Yoke
(for S0652 and S0672 only)

FINISHES:

- 6?A Antique
 6?N Nickel
 6?1 Brass
 6?2 Chrome
 6?4 Black

Inquiries on other finishes welcome

SPECIAL:

Urethane wheels are hard enough for carpeted floors and soft enough for tiled floors

BIFMA approved (for S0602 & S0652 only)

WHEEL		CASTER			PART NUMBER			
Diameter	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel		Caster Weight (lbs)
1 3/4"	75	Ball	1 13/16"	2 1/2"	Polyolefin	S0602-***-PO		0.44
	75	Ball			Envirothane™	S0602-***-U		0.44
	75	Ball			Envirothane™ Grey	S0602-***-UG		0.44
2"	75	Ball	1 7/8"	2 3/4"	Polyolefin	S0652-***-PO		0.46
	75	Ball			Envirothane™	S0652-***-U		0.51
	75	Ball			Envirothane™ Grey	S0652-***-UG		0.51
2"	75	Ball	1 7/8"	2 3/4"	Polyolefin	S0672-***-PO		0.43
	75	Ball			Envirothane™	S0672-***-U		0.48
	75	Ball			Envirothane™ Grey	S0672-***-UG		0.48

Caster weight based on Standard Plate


Caster Depot®

PLATE DIAGRAMS

STANDARD PLATE:

A12D

Plate Thickness: 3/32"

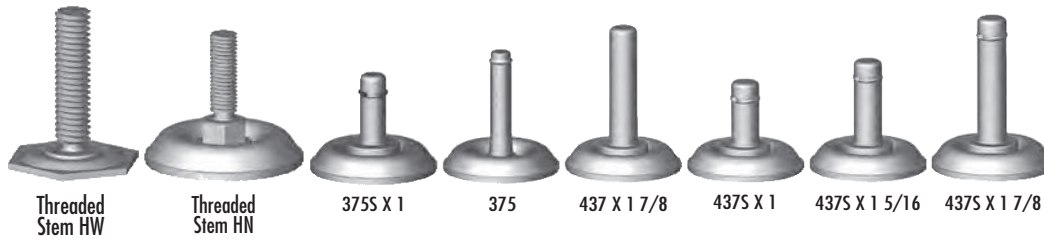

THREADED STEMS HEX WASHER

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC

THREADED STEMS HEX NUT

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC

ROUND STEMS

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring

