



5200 SERIES

300LBS
casterdepot.com



FEATURES

KINGPIN: 9/16" diameter coined rivet
RACEWAY: 1/4" diameter upper race; 3/16" diameter lower race; hardened steel load bearings
BUSHING: Nylon, steel or ball bearing

AXLE&NUT: 3/8" axle and lock nut
FINISH: Corrosion resistant bright zinc
SPECIAL: Metal dust cover protects swivel raceway. Moisture friendly.
LEG SPACING: 1 5/8"



EXCELLENT FOR:

- Bakery equipment
- Kitchen dollies
- Hospital and medical equipment
- Housekeeping and linen carts
- Material handling equipment

WHEEL CASTER PART NUMBER

Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)
3"	1 1/4"	200	Steel	3"	4 1/16"	High Temp Phenolic (475°)	SS5203-A25D-HTPH	1.79	R5203-A25D-HTPH	1.10
		200	Nylon			Soft Rubber	SS5203-A25D-SR	1.79	R5203-A25D-SR	1.10
		225	Plain			ProTech™ Flat	SS5203-A25D-PROF	1.56	R5203-A25D-PROF	0.87
		225	Ball			ProTech™ Flat	SS5203-A25D-PROF-BB	1.71	R5203-A25D-PROF-BB	1.02
		250	Ball			ProTech™ Flat Blue	SS5203-A25D-PROFB-BB	1.71	R5203-A25D-PROFB-BB	1.02
		250	Nylon			Hard Rubber	SS5203-A25D-HR	1.79	R5203-A25D-HR	1.10
		250	Steel			Hard Rubber Grey	SS5203-A25D-HRG	1.85	R5203-A25D-HRG	1.16
		250	Plain			Polyolefin	SS5203-A25D-PO	1.47	R5203-A25D-PO	0.78
		250	Steel			Soft Rubber Grey	SS5203-A25D-SRG	1.77	R5203-A25D-SRG	1.08
		300	Steel			Lava™	SS5203-A25D-1 1/2LV	1.74	R5203-A25D-1 1/2LV	1.05
		300	Steel			Phenolic	SS5203-A25D-PH	1.68	R5203-A25D-PH	1.00
		300	Plain			RollX™	SS5203-A25D-1 1/2RX	1.74	R5203-A25D-1 1/2RX	1.05
300	Steel	Solid Steel	SS5203-A25D-SS	2.31	R5203-A25D-SS	1.62				
300	Nylon	Envirothane™	SS5203-A25D-U	1.65	R5203-A25D-U	0.96				
300	Nylon	Envirothane™ Grey	SS5203-A25D-UG	1.65	R5203-A25D-UG	0.96				
3 1/2"	1 1/4"	250	Nylon	3 1/4"	4 5/8"	Hard Rubber	SS5235-A25D-HR	2.03	R5235-A25D-HR	1.39
		250	Annular			Moldon Alum. Rubber	SS5235-A25D-MAR-AB	1.96	R5235-A25D-MAR-AB	1.32
		250	Ball			Moldon Poly. Urethane	SS5235-A25D-PLY-BB-TG	1.84	R5235-A25D-PLY-BB-TG	1.20
		250	Nylon			Soft Rubber	SS5235-A25D-SR	1.95	R5235-A25D-SR	1.31
		250	Steel			Hard Rubber	SS5204-A25D-HR	2.37	R5204-A25D-HR	1.61
4"	1 1/4"	250	Steel	3 1/2"	5 1/8"	Hard Rubber Grey	SS5204-A25D-HRG	2.37	R5204-A25D-HRG	1.61
		250	Steel			High Temp Phenolic (475°)	SS5204-A25D-HTPH	2.38	R5204-A25D-HTPH	1.62
		250	Annular			Moldon Alum. Rubber	SS5204-A25D-MAR-AB	2.25	R5204-A25D-MAR-AB	1.50
		250	Plain			Polyolefin	SS5204-A25D-1 1/2PO	1.77	R5204-A25D-1 1/2PO	1.01
		250	Steel			Soft Rubber	SS5204-A25D-SR	2.21	R5204-A25D-SR	1.45
		250	Steel			Soft Rubber Grey	SS5204-A25D-SRG	2.21	R5204-A25D-SRG	1.45
		275	Plain			ProTech™ Flat	SS5204-A25D-PROF	1.87	R5204-A25D-PROF	1.11
		275	Ball			ProTech™ Flat	SS5204-A25D-PROF-BB	2.03	R5204-A25D-PROF-BB	1.27
		275	Ball			ProTech™ Flat Blue	SS5204-A25D-PROFB-BB	2.03	R5204-A25D-PROFB-BB	1.27
		300	Steel			Lava™	SS5204-A25D-1 1/2LV	2.21	R5204-A25D-1 1/2LV	1.45
		300	Steel			Phenolic	SS5204-A25D-PH	2.17	R5204-A25D-PH	1.41
		300	Ball			Moldon Poly. Urethane	SS5204-A25D-PLY-BB-TG	2.05	R5204-A25D-PLY-BB-TG	1.29
		300	Plain			RollX™	SS5204-A25D-1 1/2RX	2.21	R5204-A25D-1 1/2RX	1.45
		300	Steel			Solid Steel	SS5204-A25D-SS	3.40	R5204-A25D-SS	2.64
		300	Nylon			Envirothane™	SS5204-A25D-U	2.00	R5204-A25D-U	1.23
		300	Nylon			Envirothane™ Grey	SS5204-A25D-UG	2.00	R5204-A25D-UG	1.23

OPTIONS:

- PWB Pedal Wheel Brake
- TLB Top Locking Brake
- BB Ball Bearing (PROF, SR, SRG, U and UG)
- RB Roller Bearing (available in 1 1/2" tread wheels)
- TG Thread Guards
- Z Zerk Axle

FINISHES:


- 52?2 Chrome
 - 52?4 Black
 - 52?5 Yellow Chromate
- Inquiries on other finishes welcome

PLATE DIAGRAMS

STANDARD PLATE: A25D

D - Plate Thickness: 3/32"

WHEEL		CASTER				PART NUMBER					
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)	
5"	1 1/4"	250	Steel	4"	6 3/16"	Hard Rubber	S5205-A25D-HR	2.77	R5205-A25D-HR	2.07	
		250	Plain			Polyolefin	S5205-A25D-PO	1.90	R5205-A25D-PO	1.20	
		250	Steel			Soft Rubber	S5205-A25D-SR	2.69	R5205-A25D-SR	2.00	
		250	Steel			Soft Rubber Grey	S5205-A25D-SRG	2.69	R5205-A25D-SRG	2.00	
		275	Annular			Moldon Alum. Rubber	S5205-A25D-MAR-AB	2.52	R5205-A25D-MAR-AB	1.82	
		275	Plain			ProTech™ Flat	S5205-A25D-PROF	2.01	R5205-A25D-PROF	1.31	
		275	Ball			ProTech™ Flat	S5205-A25D-PROF-BB	2.18	R5205-A25D-PROF-BB	1.48	
		275	Ball			ProTech™ Flat Blue	S5205-A25D-PROFB-BB	2.18	R5205-A25D-PROFB-BB	1.48	
		300	Steel			High Temp Phenolic (475°)	S5205-A25D-HTPH	2.98	R5205-A25D-HTPH	2.28	
		300	Plain			Lava™	S5205-A25D-1 1/2LV	2.50	R5205-A25D-1 1/2LV	1.80	
		300	Steel			Phenolic	S5205-A25D-PH	2.63	R5205-A25D-PH	1.93	
		300	Ball			Moldon Poly. Urethane	S5205-A25D-PLY-BB-TG	2.25	R5205-A25D-PLY-BB-TG	1.55	
		300	Plain			RollX™	S5205-A25D-1 1/2RX	2.50	R5205-A25D-1 1/2RX	1.80	
		300	Steel			Solid Steel	S5205-A25D-SS	3.62	R5205-A25D-SS	2.92	
		300	Nylon			Envirothane™	S5205-A25D-U	2.26	R5205-A25D-U	1.56	
		300	Nylon			Envirothane™ Grey	S5205-A25D-UG	2.26	R5205-A25D-UG	1.56	

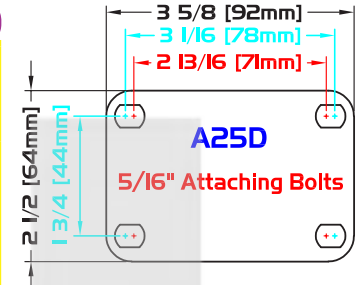

PWB Pedal Wheel Brake



CasterDepot®