

8000 LOW PROFILE CASTERS

SERIES

600 LBS
casterdepot.com



FEATURES

KINGPIN: 5/16" rivet
RACEWAY: 3/16" diameter over and under race; hardened steel load bearings
BUSHING: Nylon, steel bearing

AXLE&NUT: 5/16" axle and nut
FINISH: Bright chrome
HARDENED: Washer
SPECIAL: Wide selection of specialty stems and plates

EXCELLENT FOR:

- Pianos & heavy equipment
- Floor protection & excellent mobility
- Business machines




OPTIONS:

TSB Thumb Screw Brake
 (included in 8030 only)

WHEEL		CASTER				PART NUMBER		Caster Weight (lbs)
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	
2" Dual Wheel	7/8"	150	Plain	1 13/16"	2 7/8"	ProTech™ Flat	S8022-***-PROF	0.82
		160	Nylon			Soft Rubber	S8022-***-SR	1.10
		200	Nylon			Hard Rubber	S8022-***-HR	1.10
		200	Steel			Envirothane™	S8022-***-U	0.88
		200	Steel			Envirothane™ Grey	S8022-***-UG	0.88
2"	1 3/4"	200	Plain	1 13/16"	2 7/8"	Polyolefin	S8022-***-PO	0.84
3"	1 13/16"	600	Roller	2 5/16"	4 1/16"	Phenolic	S8030-A32F-PH-RB-TSB-Z	2.50

PLATE DIAGRAMS

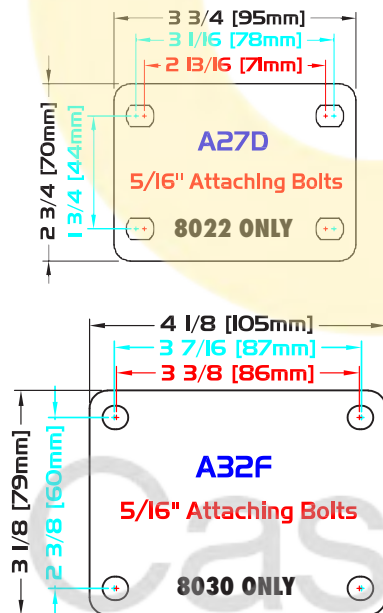

STANDARD 8022 PLATE: A27D
 STANDARD 8030 PLATE: A32F

A27D
 A32F

D Plate Thickness: 3/32"
 F Plate Thickness: 5/32"

STEMS

THREADED STEMS HEX NUT (8022 only)

***	DIAMETER	LENGTH	TYPE
1/2-13X1 1/2HN	1/2"	1 1/2"	NC



THREADED STEMS HEX WASHER (8022 only)

***	DIAMETER	LENGTH	TYPE
1/2-13X1HW	1/2"	1"	NC
1/2-13X1 1/2HW	1/2"	1 1/2"	NC



ROUND STEMS (8022 only)

***	DIAMETER	LENGTH	TYPE
437SX1 5/16	7/16"	1 5/16"	Friction Ring



437SX1 5/16