
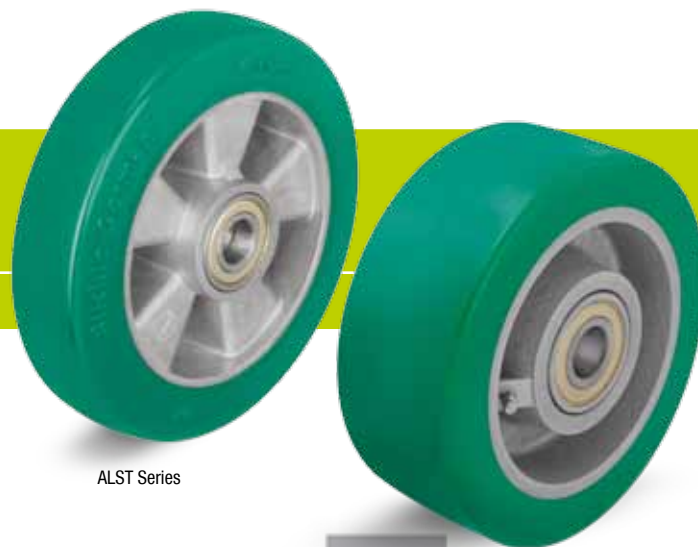


## ALST, GST Series

Heavy Duty Wheels with **Blickle Softhane®** Polyurethane Tread, with Aluminum or Cast Iron Wheel Center

 500 - 3,100 lbs

 RoHS



ALST Series

GST Series

<b>Tread &amp; tire hardness</b>	75° shore A
<b>Temperature resistance</b>	-15° F - +160° F temporarily up to +195° F
<b>Rolling resistance</b>	very good
<b>Operating noise</b>	very good
<b>Floor surface preservation</b>	very good



Wheels	Wheel Ø (D) [inch] [mm]	Wheel width (T2) [inch] [mm]	Load capacity [lbs] [kg]	Bearing type	Axle bore Ø (d) [mm]	Hub length (T1) [inch] [mm]	G15 page
<b>ALST series</b>							
ALST 82/15K	3 1/8 [80]	1 1/16 [40]	500 [230]	Ball bearing	15	1 1/16 [40]	222
ALST 100/15K	4 [100]	1 1/16 [40]	660 [300]	Ball bearing	15	1 1/16 [40]	222
ALST 125/15K	5 [125]	1 1/16 [40]	770 [350]	Ball bearing	15	1 3/4 [45]	222
ALST 150/20K-CO *	6 [150]	2 1/8 [54]	1100 [500]	Ball bearing	20	2 11/32 [60]	222
ALST 160/20K-CO *	6 3/16 [160]	2 [50]	1210 [550]	Ball bearing	20	2 11/32 [60]	222
ALST 200/20K-CO *	8 [200]	2 [50]	1540 [700]	Ball bearing	20	2 11/32 [60]	222
<b>GST series</b>							
GST 127/20K	5 [125]	2 [50]	990 [450]	Ball bearing	20	2 11/32 [60]	229
GST 150/20K	6 [150]	2 [50]	1210 [550]	Ball bearing	20	2 11/32 [60]	229
GST 200/20K	8 [200]	2 [50]	1760 [800]	Ball bearing	20	2 11/32 [60]	229
GST 202/25K	8 [200]	3 1/8 [80]	2640 [1200]	Ball bearing	25	3 17/32 [90]	229
GST 252/25K	10 [250]	3 1/8 [80]	3100 [1400]	Ball bearing	25	3 17/32 [90]	229

\* With extra crowned running tread

### ALST / GST-wheel series:

**Tread:** Made of high-quality, reaction-cast polyurethane-elastomer **Blickle Softhane®**, 75° shore A hardness, very high operational comfort due to an extremely thick, elastic tread, low-noise operation, low rolling resistance, very good floor preservation, high abrasion resistance, high cut and tear propagation resistance, color green, non-marking, non-staining, very good chemical connection with the wheel center.

### Wheel center:

**ALST series:** Made of die-cast aluminum.

**GST series:** Made of rugged gray cast iron, wheel Ø 8" or larger with grease nipple, lacquered, color silver.

### Bearing type:

- Ball bearing: Two pressed-in ball bearings, lubricated with long-life grease.

### Other features:

High chemical resistance to many aggressive substances.

Operating temperature: -15° F to +160° F, temporarily up to +195° F.

At ambient temperatures above +105° F the load capacity is reduced.

Maintenance-free under standard conditions.



**BUSHING**  
REFER TO PAGE 20

# CasterDepot


More options in the Blickle general catalog G15!

### Options




	Antistatic version, non-marking gray	Drive wheels with hub keyway	With tapered roller bearing
<b>Product code suffix</b>	-AS	GSTN series	
<b>Available for</b>	upon request	refer to page 75	GST series upon request


ALST series  
wheel Ø 3 1/8" - 5"

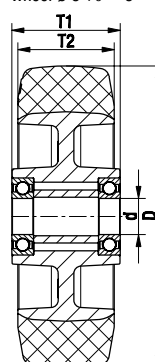

ALST series  
wheel Ø 6" - 8"



GST series  
wheel Ø 5" - 6"



GST series  
wheel Ø 8" - 10"

