
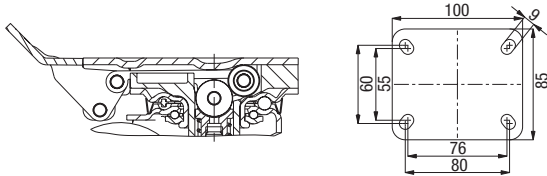


## HRLK Series

### Industrial Top Plate Casters with Integrated Truck Lock - Metric Standards

 400 - 660 lbs

 RoHS



The HRLK rig series with top plate fitting is available with the following wheels:

POG



Wheel: Impact-resistant nylon, 70° shore D, gray.  
Bearing type: Plain bore.  
For more information refer to page 76

ALTH



Tread: High-quality polyurethane-elastomer Bicklex Extrathane®, 92° shore A, light brown, non-marking, non-staining. Cast tread.  
Wheel center: Die-cast aluminum.  
Bearing type: Ball bearing.  
For more information refer to page 73

SPOG




Wheel: High-quality, impact-resistant nylon, very rugged, extra heavy wheel design, 70° shore D, gray.  
Bearing type: Ball bearing.  
For more information refer to page 77

Swivel casters *	Wheel Ø (D)		Wheel width (T2)		Load capacity		Bearing type	Total height (H)		Max. total height (h)		Lifting height (T4)		Plate size	Bolt hole spacing [mm]	For mount- ing bolt [inch]	Offset [inch]
	[inch]	[mm]	[inch]	[mm]	[lbs]	[kg]		[inch]	[mm]	[inch]	[mm]	[inch]	[mm]				
HRLK-POG series																	
HRLK-POG 82G	3 1⁄8	[80]	1 7⁄16	[37]	505	[230]	Plain bore	4 11⁄16	[120]	4 3⁄64	[122]	5⁄64	[2]	100 x 85	80 x 60	5⁄16	2 13⁄64
HRLK-POG 100G	4	[100]	1 7⁄16	[37]	505	[230]	Plain bore	5 1⁄2	[140]	5 33⁄64	[142]	5⁄64	[2]	100 x 85	80 x 60	5⁄16	2 17⁄32
HRLK-SPOG series																	
HRLK-SPOG 80K	3 1⁄8	[80]	1 7⁄16	[37]	660	[300]	Ball bearing	4 11⁄16	[120]	4 5⁄64	[122]	5⁄64	[2]	100 x 85	80 x 60	5⁄16	2 13⁄64
HRLK-ALTH series																	
HRLK-ALTH 80K	3 1⁄8	[80]	1 1⁄8	[30]	400	[180]	Ball bearing	4 11⁄16	[120]	4 5⁄64	[122]	5⁄64	[2]	100 x 85	80 x 60	5⁄16	2 13⁄64
HRLK-ALTH 100K	4	[100]	1 3⁄8	[40]	505	[230]	Ball bearing	5 1⁄2	[140]	5 33⁄64	[142]	5⁄64	[2]	100 x 85	80 x 60	5⁄16	2 17⁄32

\* The foot-operated actuation lever of the Bicklex HRLK series does not rotate with the swivel head and is therefore always accessible.

CasterDepot

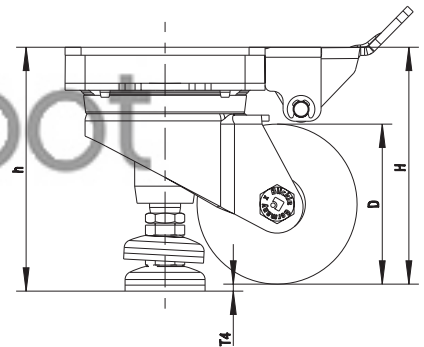

More options in the Bicklex general catalog G15!

Options



	HRLH series up to 660 lbs	HRLHD series up to 1,320 lbs	HRP series	HRIG series	HRSP series up to 4,400 lbs	Matching synthetic adapter plate **	Stainless steel version
Product code suffix	HRLH-SPO 75K	HRLHD-SPO 75K	HRP-POA series	HRIG-POA series	HRSP-POA 72G HRSP-GSPO 90G	AP1	HRLKX series
Available for	upon request	upon request	wheel Ø 1 3/4" - 3" upon request	wheel Ø 1 3/4" - 3" upon request	wheel Ø 3" - 3 1/2" upon request	upon request	upon request

\*\* For total height compensation (+3/8") for corresponding swivel and rigid casters