


HTH, HTHW Series

Rollers for Pallet Trucks with Blicke Extrathane®
Polyurethane Tread, HTHW Series Splash and Washproof

400 - 1,850 lbs

✓RoHS

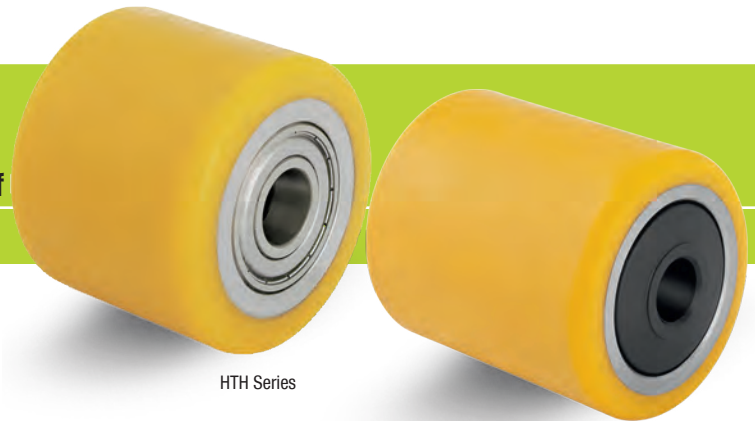

HTH Series

HTHW Series

Tread & tire hardness	92° shore A
Temperature resistance	-15° F - +160° F temporarily up to +195° F
Rolling resistance	very good
Operating noise	good
Floor surface preservation	good



HTH / HTHW-pallet truck roller series:

Tread: Made of high-quality, reaction-cast polyurethane-elastomer Blicke Extrathane®, 92° shore A hardness, low-noise operation, low rolling resistance, good floor preservation, high abrasion resistance, high cut and tear propagation resistance, color light brown, non-marking, non-staining, very good chemical connection with the wheel center. Cast tread.

Wheel center: Made of steel.

Bearing type (HTH series):

- Ball bearing: Two pressed-in ball bearings, lubricated with long-life grease.

Bearing type (HTHW series):

- Ball bearing: Two pressed-in ball bearings, additional ball bearing seals, lubricated with long-life grease. **The combination of clearance sealing and slipping sealing ensures an optimum ball bearing protection against splash water and contamination.**

Other features:

High chemical resistance to many aggressive substances.

Operating temperature: -15° F to +160° F, temporarily up to +195° F.


At ambient temperatures above +105° F the load capacity is reduced.

Maintenance-free under standard conditions.

Rollers for pallet trucks	Wheel Ø (D)	Wheel width (T2)	Load capacity	Bearing type	Axle bore Ø (d)	Clamping length (T5)	G15 page
	[inch]	[mm]	[lbs]	[kg]	[mm]	[inch]	
HTH series							
HTH 60x35/15-35K	2 1/32	1 3/8	400	6002 ZZ	15	1 3/8	438
HTH 60x60/10-56K	2 1/32	2 1/32	705	6200 ZZ	10	2 3/16	438
HTH 75x40/20-40K	3	1 1/16	595	6204 ZZ	20	1 1/16	438
HTH 75x62/20-62K	3	2 7/16	900	6204 ZZ	20	2 7/16	438
HTH 75x75/20-75K	3	3	1100	6204 ZZ	20	2 5/16	438
HTH 75x95/20-95K	3	3 23/32	1410	6204 ZZ	20	3 23/32	438
HTH 80x40/20-40K	3 1/8	1 1/16	615	6204 ZZ	20	1 1/16	438
HTH 80x54/20-54K	3 1/8	2 1/8	835	6204 ZZ	20	2 1/8	438
HTH 80x70/20-70K	3 1/8	2 3/4	1100	6204 ZZ	20	2 3/4	438
HTH 80x80/20-80K	3 1/8	3 1/8	1255	6204 ZZ	20	3 1/8	438
HTH 82x60/20-60K	3 1/32	2 11/32	970	6204 ZZ	20	2 11/32	438
HTH 82x65/20-65K	3 1/32	2 17/32	1035	6204 ZZ	20	2 17/32	438
HTH 82x70/20-70K	3 1/32	2 3/4	1120	6204 ZZ	20	2 3/4	439
HTH 82x82/20-86K	3 1/32	3 1/8	1320	6204 ZZV	20	3 1/8	439
HTH 82x100/20-100K	3 1/32	4	1605	6204 ZZ	20	3 15/16	439
HTH 85x75/20-75K	3 1/32	3	1255	6204 ZZ	20	2 3/16	439
HTH 85x90/20-90K	3 1/32	3 17/32	1495	6204 ZZ	20	3 17/32	440
HTH 85x95/20-100K	3 1/32	3 23/32	1585	6204 ZZV	20	3 15/16	440
HTH 85x100/25-100K	3 1/32	4	1670	6005 ZZ	25	3 15/16	440
HTH 85x110/25-110K	3 1/32	4 5/16	1850	6005 ZZ	25	4 3/16	440
HTHW series							
HTHW 82x60/20-64K	3 1/32	2 11/32	970	Ball bearing	20	2 1/2	442
HTHW 82x82/20-86K	3 1/32	3 1/32	1320	Ball bearing	20	3 3/8	442
HTHW 82x100/20-104K	3 1/32	4	1605	Ball bearing	20	4 1/2	442
HTHW 85x70/12-75K	3 1/32	2 3/4	1165	Ball bearing	12	2 15/16	442
HTHW 85x80/25-85K	3 1/32	3 1/8	1340	Ball bearing	25	3 11/32	442
HTHW 85x85/25-90K	3 1/32	3 11/32	1430	Ball bearing	25	3 17/32	443
HTHW 85x90/25-95K	3 1/32	3 17/32	1495	Ball bearing	25	3 23/32	443
HTHW 85x95/20-100K	3 1/32	3 23/32	1585	Ball bearing	20	3 15/16	443
HTHW 85x95/25-100K	3 1/32	3 23/32	1585	Ball bearing	25	3 15/16	443
HTHW 85x110/25-115K	3 1/32	4 5/16	1850	Ball bearing	25	4 1/2	443


More options in the Blicke general catalog G15!

Options

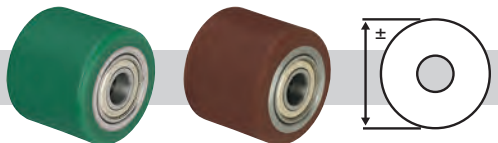

	With Blicke Softthane® polyurethane tread, 75° shore A	High dynamic tread with reduced rolling resistance	Further dimensions
Product code	HST series	HB series	
Available for	upon request	upon request	upon request

HTH series



HTHW series

