
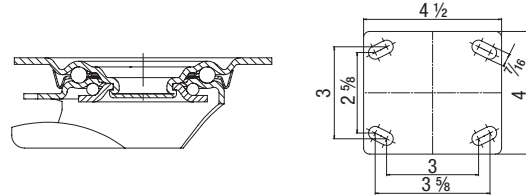






LKX 14-Series

Stainless Steel Industrial Top Plate Casters

 220 - 770 lbs


 RoHS


The LKX and BKSX rig series with top plate fitting are available with the following wheels:

TPA		Tread: High-quality thermoplastic rubber-elastomer (TPE), containing traces of oil, 85° shore A, gray, non-marking, chemically bonded. Wheel center: Impact-resistant polypropylene, silver gray. Bearing type: Ball bearing (C) with additional ball bearing seals, with synthetic thread guard. For more information refer to page 64	POTH		Tread: High-quality thermoplastic polyurethane (TPU), 94° shore A, dark gray, non-marking, non-staining, chemically bonded. Wheel center: Impact-resistant nylon, natural white. Bearing type: Sealed ball bearing (C). For more information refer to page 70
SPOG		Wheel: High-quality, impact-resistant nylon, very rugged, extra heavy wheel design, 70° shore D, gray. Bearing type: Stainless steel ball bearing. For more information refer to page 77	POEV		Tires: High-quality elastic solid rubber in smooth rolling quality 'Blickle EasyRoll', 65° shore A, gray, Vulcanized tire. Wheel center: Impact-resistant nylon, black. Bearing type: Stainless steel ball bearing (C) and synthetic cover. For more information refer to page 67

Swivel casters	Rigid casters	Swivel casters with 'stop-fix' brake	Wheel Ø [inch][mm]	Wheel width [inch][mm]	Load capacity [lbs][kg]	Bearing type	Total height [inch][mm]	Plate size [inch]	Bolt hole spacing [inch]	For mounting bolt [inch]	Offset [inch]
LKX-TPA series											
LKX-TPA 102KD-14-FK	BKSX-TPA 102KD-14-FK	LKX-TPA 102KD-14-FI-FK	4	[100] 1 1/4 [32]	220 [100]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 3/4
LKX-TPA 127KD-14-FK	BKSX-TPA 127KD-14-FK	LKX-TPA 127KD-14-FI-FK	5	[125] 1 1/4 [32]	275 [125]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 7/8
LKX-SPOG series											
LKX-SPOG 100XK-14	BKSX-SPOG 100XK-14	LKX-SPOG 100XK-14-FI	4	[100] 1 1/8 [37]	770 [350]	Ball bearing	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 3/4
LKX-SPOG 125XK-14	BKSX-SPOG 125XK-14	LKX-SPOG 125XK-14-FI	5	[125] 1 1/8 [40]	770 [350]	Ball bearing	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 7/8
LKX-POTH series											
LKX-POTH 100KD-14	BKSX-POTH 100KD-14	LKX-POTH 100KD-14-FI	4	[100] 1 3/8 [35]	660 [300]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 3/4
LKX-POTH 125KD-14	BKSX-POTH 125KD-14	LKX-POTH 125KD-14-FI	5	[125] 1 3/8 [40]	770 [350]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 7/8
LKX-POEV series											
LKX-POEV 100XKA-14-SG	BKSX-POEV 100XKA-14-SG	LKX-POEV 100XKA-14-FI-SG	4	[100] 1 1/2 [38]	330 [150]	Ball bearing (C)	5 1/8 [130]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 3/4
LKX-POEV 125XKA-14-SG	BKSX-POEV 125XKA-14-SG	LKX-POEV 125XKA-14-FI-SG	5	[125] 1 5/8 [40]	330 [150]	Ball bearing (C)	6 1/8 [155]	4 x 4 1/2	2 5/8 x 3 3/8 / 3x3	3/8	1 7/8

Options



	With automatic direction reset device for AGV applications	With stainless steel ball bearing or roller bearing in the wheel	Heat-resistant version	European metric top plate fitting 100x85 / 80x60 mm
Product code suffix	-RIR2	-XKA / -XR	LIKX series	
Available for	upon request	upon request	upon request	refer to G15 catalog