

## LRA Series for 3/8" Mounting Bolt


### Light Duty Institutional Bolt Hole Swivel Casters

 110 - 220 lbs

 RoHS




2

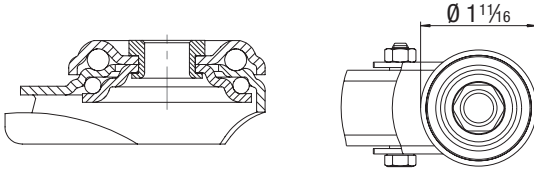

The LRA rig series with bolt hole fitting is available with the following wheels:

TPA




Tread: High-quality thermoplastic rubber-elastomer (TPE), containing traces of oil, 85° shore A, gray, non-marking, chemically bonded.

Wheel center: Impact-resistant polypropylene, silver gray.

Bearing types: Plain bore or ball bearing (C) with synthetic thread guard.

For more information refer to page 64


POA



Wheel: Impact-resistant nylon, 70° shore D, black.

Bearing type: Plain bore.

For more information refer to page 76




**PATH**

Tread: High-quality thermoplastic polyurethane (TPU), 94° shore A, dark gray, non-marking, non-staining, chemically bonded.

Wheel center: Impact-resistant nylon, silver gray.

Bearing type: Ball bearing (C) with synthetic thread guard.

For more information refer to page 65



**VSTH**

Tread: High-quality polyurethane-elastomer Bicklex Extrathane®, 92° shore A, light brown, non-marking, non-staining. Cast tread.

Wheel center: Made of steel.

Bearing type: Ball bearing.

For more information refer to page 73

Swivel casters	Swivel casters with 'stop-fix' brake	Wheel Ø		Wheel width		Load capacity		Bearing type	Total height		Plate Ø	For mounting bolt	Offset	G15 page
		[inch]	[mm]	[inch]	[mm]	[lbs]	[kg]		[inch]	[mm]	[inch]	[inch]	[inch]	
<b>LRA-TPA series</b>														
LRA-TPA 50G	LRA-TPA 50G-FI	2	[50]	3/4	[19]	110	[50]	Plain bore	2 3/4	[69]	1 1/16	3/8	1	89
LRA-TPA 50K-FK	LRA-TPA 50K-FI-FK	2	[50]	3/4	[19]	110	[50]	Ball bearing (C)	2 3/4	[69]	1 1/16	3/8	1	89
LRA-TPA 75G	LRA-TPA 75G-FI	3	[75]	1	[25]	165	[75]	Plain bore	3 7/8	[98]	1 1/16	3/8	1 1/8	89
LRA-TPA 75K-FK	LRA-TPA 75K-FI-FK	3	[75]	1	[25]	165	[75]	Ball bearing (C)	3 7/8	[98]	1 1/16	3/8	1 1/8	89
LRA-TPA 100G	LRA-TPA 100G-FI	4	[100]	1	[25]	155	[70]	Plain bore	4 3/4	[121]	1 1/16	3/8	1 15/16	89
<b>LRA-POA series</b>														
LRA-POA 50G	LRA-POA 50G-FI	2	[50]	3/4	[18]	165	[75]	Plain bore	2 3/4	[69]	1 1/16	3/8	1	105
LRA-POA 75G	LRA-POA 75G-FI	3	[75]	1	[23]	165	[75]	Plain bore	3 7/8	[98]	1 1/16	3/8	1 1/8	105
<b>LRA-PATH series</b>														
LRA-PATH 50K-FK	LRA-PATH 50K-FI-FK	2	[50]	3/4	[19]	165	[75]	Ball bearing (C)	2 3/4	[69]	1 1/16	3/8	1	100
LRA-PATH 75K-FK	LRA-PATH 75K-FI-FK	3	[75]	1	[25]	165	[75]	Ball bearing (C)	3 7/8	[98]	1 1/16	3/8	1 1/8	100
<b>LRA-VSTH series</b>														
LRA-VSTH 35K		1 3/8	[38]	1 1/8	[27]	220	[100]	Ball bearing	2	[50]	1 1/16	3/8	9/16	109

More options in the Bicklex general catalog G15!

Options



	Rigid casters	With threaded bolt Ø 3/8"	Metal expander fitting	Electrically conductive version, non-marking gray *	Stainless steel version
Product code suffix	<b>BRA series</b>		refer to page 39	<b>-ELS</b>	<b>LRXA series</b>
Available for	wheel Ø 2" and 3" upon request	upon request	wheel Ø 2" and 3" upon request	TPA, PATH series upon request	wheel Ø 2" and 3" upon request

\* Load capacity is reduced by 35 % to guarantee conductivity