






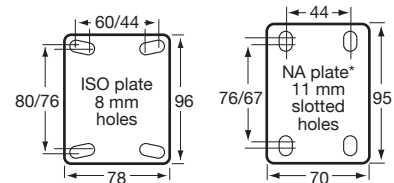
AGV Cart Castors 500 KG

M SERIES WHEEL

	Diameter x tread (mm)	Hub x bore (mm)	Max load (kg)
 QTQ Grey energy absorbent elastomer, round profile, precision bearing, thread guard	150 x 34	40 x 8	200



M SERIES FORKS

	Wheel Diameter	Height (mm)	Turning radius (mm)
 MZPSA Plate with swivel and self-aligning device	150	187	130
 MZF Fixed plate	150	187	-
 MZPTBSA Plate with swivel, total brake and self-aligning device	150	187	153
 MZPDLA Plate with swivel, direction lock and self-aligning device	150	187	153








* North American plate. Add **N** at the end of fork code to purchase (e.g. QTQ150/MZPNTBSA).

O SERIES WHEELS

	Diameter x tread (mm)	Hub x bore (mm)	Max load (kg)
 HUS* Polyurethane on nylon, roller bearing, optional thread guard (150 mm wheel only)	125 x 50 150 x 40 200 x 48	60 x 12.7 60 x 12.7 60 x 12.7	350 450 500
 OBC* Blue high resilience elastomer, round profile, precision ball bearing, no thread guard	125 x 50 150 x 50 200 x 50	60 x 12.7 60 x 12.7 60 x 12.7	350 400 400

O SERIES FORKS

	Wheel Diameter	Height (mm)	Turning radius (mm)
 OSPSA¹ Plate with swivel and self-aligning device	125 150 200	162 189 239	109 242 304
 HSF¹ Fixed plate, no swivel	125 150 200	162 189 239	- - -
 OSPTBSA¹ Plate with swivel and total brake	125 150 200	162 189 239	162 242 304
 OSPDLA¹ Plate with swivel and direction lock	125 150 200	162 189 239	162 242 304

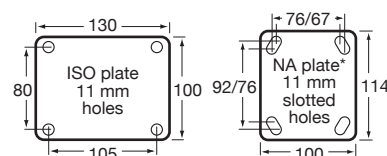

M SERIES ORDER CODES

Wheel code	Fork code	Castor code
QTQ150	M150ZPSA	QTQ150/MZPSA
Diameter: 150 mm	M150ZF	QTQ150/MZF
	M150ZPTBSA	QTQ150/MZPTBSA
	M150ZPDLA	QTQ150/MZPDLA

O SERIES ORDER CODES

Wheel code	Fork code	Castor code
HUS125*	O125SPSA	HUS125/OSPSA
Diameter: 125 mm	H125SF	HUS125/HSF
	O125SPTBSA	HUS125/OSPTBSA
	O125SPDLA	HUS125/OSPDLSA
HUS150*	O150SPSA	HUS150/OSPSA
Diameter: 150 mm	H150SF	HUS150/HSF
	O150SPTBSA	HUS150/OSPTBSA
	O150SPDLA	HUS150/OSPDLSA
HUS200*	O200SPSA	HUS200/OSPSA
Diameter: 200 mm	H200SF	HUS200/HSF
	O200SPTBSA	HUS200/OSPTBSA
	O200SPDLA	HUS200/OSPDLSA
OBC125*	O125SPSA	OBC125/OSPSA
Diameter: 125 mm	H125SF	OBC125/HSF
	O125SPTBSA	OBC125/OSPTBSA
	O125SPDLA	OBC125/OSPDLSA
OBC150*	O150SPSA	OBC150/OSPSA
Diameter: 150 mm	H150SF	OBC150/HSF
	O150SPTBSA	OBC150/OSPTBSA
	O150SPDLA	OBC150/OSPDLSA
OBC200*	O200SPSA	OBC200/OSPSA
Diameter: 200 mm	H200SF	OBC200/HSF
	O200SPTBSA	OBC200/OSPTBSA
	O200SPDLA	OBC200/OSPDLSA

* Wheels also available with mild steel bearings—HUR, OBQ.

¹ Forks also available in mild steel bearings—OZPSA, HZF, OZPTBSA, OZPDLA.