

# Medium/Heavy duty Polyurethane wheels

Medium/Heavy Duty Wheels

AL CORE

kg 250 ~ 2,300 kg

✓ RoHS





## High quality polyurethane wheels

- ✓ Light weight, Strong corrosion resistance  
by the application of the aluminum core
- ✓ High quality polyurethane + Excellent adhesion
- ✓ Strong water resistance, Strong corrosion resistance
- ✓ Anti-static wheel is available (Black color, non-marking) ⚡
- ✓ Temp. range : -10 ~ +90°C

Model	Wheel types	Details	Wheel dia (D)	Wheel width (W)	Shaft dia. (A)	Hub length (L)	Load capacity (kg)	Bearing
HUP	HUP-50-25	✓ Cast PU(Shore D70)	50	25	10	27	250	X
	HUP-63-30	✓ Aluminum core	63	30	12	34	500	X
	HUP-75-30	✓ Plain bearing	75	30	12	35	750	X
HUD	HUD-100-48		100	48	15	50	400	6202 ZZ
	HUD-125-68		125	68	25	70	1,100	6205 ZZ
	HUD-130-40		130	40	15	50	430	6202 ZZ
	HUD-130-48		130	48	15	50	500	6202 ZZ
	HUD-150-40	✓ Cast PU(Shore A95)	150	40	15	50	550	6202 ZZ
	HUD-150-48	✓ Aluminum core	150	48	15	50	600	6202 ZZ
	HUD-150-68	✓ 2 Ball bearings	150	68	30	70	1,500	6206 ZZ
	HUD-200-40		200	40	15	50	550	6202 ZZ
	HUD-200-48		200	48	15	60	600	6202 ZZ
	HUD-200-68		200	68	30	70	2,000	6206 ZZ
	HUD-250-60		250	60	25	60	1,350	6205 ZZ
	HUD-250-64		250	64	30	70	2,300	6206 ZZ
HUD	HUD-60-48		60	48	15	50	400	6003 ZZ
	HUD-70-48	✓ Cast PU(Shore D70)	70	48	15	50	500	6003 ZZ
	HUD-75-40	✓ Aluminum core	75	40	25	40	400	6005 ZZ
	HUD-100-40	✓ 2 Ball bearings	100	40	25	40	550	6005 ZZ
	HUD-125-40		125	40	25	40	700	6005 ZZ
HUD-WEU	HUD-WEU-100-48	✓ Cast PU(Shore A95)	100	48	15	50	400	6202 ZZ
	HUD-WEU-130-40	✓ Aluminum core	130	40	15	50	430	6202 ZZ
	HUD-WEU-150-40	✓ 2 Ball bearings	150	40	15	50	550	6202 ZZ
	HUD-WEU-200-40	✓ Anti-static version (10 <sup>8</sup> ~ 10 <sup>9</sup> Ωcm)	200	40	15	50	550	6202 ZZ

### Wheel types \*\*

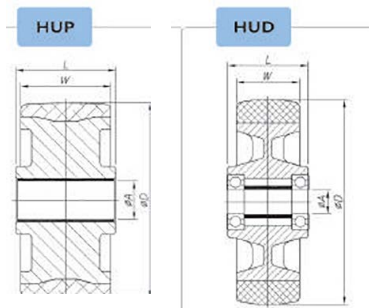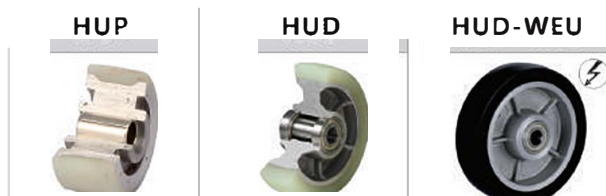

# Medium/Heavy duty Polyurethane wheels

Medium/Heavy Duty Wheels

**STEEL CORE**

**kg** 200 ~ 2,600 kg

✓ RoHS



## High quality polyurethane wheel

- ✓ Solid structure by the application of the steel core
- ✓ High quality polyurethane + Excellent adhesion
- ✓ Strong oil resistance, Strong corrosion resistance
- ✓ Temp. range : -10 ~ +90°C

Model	Wheel types	Details	Wheel dia (D)	Wheel width (W)	Shaft dia. (A)	Hub length (L)	Load capacity (kg)	Bearing
HUD	HUD-100-29		100	29	15	27	200	6202 ZZ
	HUD-110-29		110	29	15	27	200	6202 ZZ
	HUD-150-40	✓ Cast PU(Shore A95)	150	40	17	40	400	6203 ZZ
	HUD-200-65	✓ Steel core	200	65	25	65	1,250	6205 ZZ
	HUD-250-78	✓ 2 Ball bearings	250	78	35	80	2,200	UR207
	HUD-300-78		300	78	35	80	2,600	UR207
HUD	HUD-80-48	✓ Cast PU(Shore D70)	80	48	20	48	500	6204 ZZ
	HUD-100-48	✓ Steel core	100	48	20	48	600	6204 ZZ
		✓ 2 Ball bearings						
HUQ	HUQ-100-50	✓ Cast PU(Shore A95)	100	50	15	62	400	6202 ZZ
		✓ Steel core						
		✓ 4 ball bearings						

# CasterDepot®

### Wheel types \*\*

**HUD**



**HUQ**



**HUD/HUQ**

